


## Differential Pressure Flow Sensors


## V100 & V110 Compression Fitting

### The Most Accurate and Reliable Technology for Measuring Gas, Liquid and Steam...

Developed from aerospace technology, the Verabar® averaging pitot flow sensor provides unsurpassed accuracy and reliability. With its solid, one-piece construction and bullet shape, the Verabar makes flow measurement leak proof and precise.

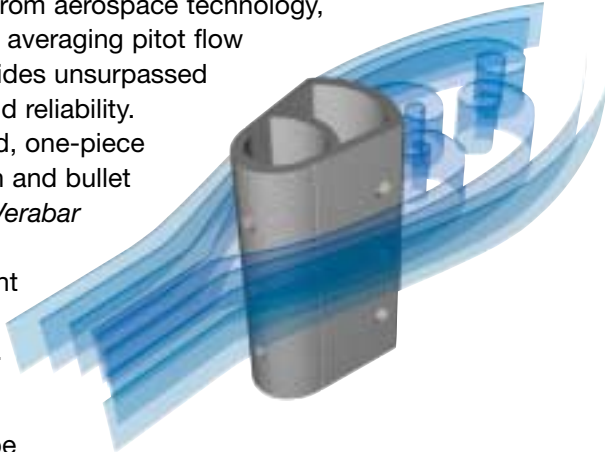

The unique sensor shape reduces drag and flow induced vibration. The location of the low-pressure ports eliminates the potential for clogging and improves signal stability.

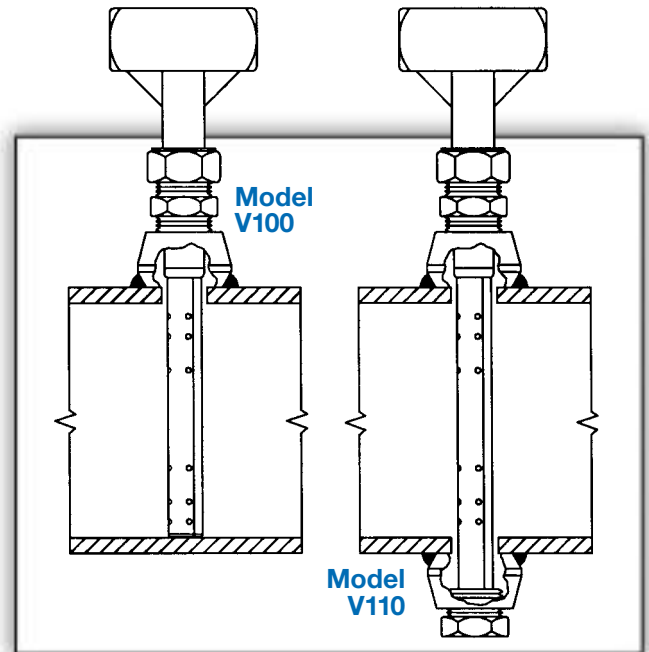


<b>V100 Single Support</b> <b>V110 Opposite Support</b>	
<b>Pipe Connection</b>	Threaded (NPT)
<b>Mounting Type</b>	Tube fitting
<b>Features and Benefits</b>	<ul style="list-style-type: none"> <li>• Most cost effective model</li> <li>• Installed in less than one hour</li> <li>• Low and medium pressures</li> </ul>
<b>Applications</b>	<ul style="list-style-type: none"> <li>• Pipes (steel, PVC, FRP, copper)</li> <li>• Air (compressed, combustion)</li> <li>• Natural gas</li> <li>• Stack/flue gas</li> <li>• Water (raw, cooling, feedwater)</li> <li>• Low pressure steam</li> <li>• Non-hazardous fluids</li> </ul>
<b>Special Designs—Consult Factory</b>	<ul style="list-style-type: none"> <li>• Custom mounting, lengths, materials, instrument connections, etc.</li> <li>• Short straight run</li> </ul>

<b>Temperature Pressure Limits</b> <b>(ANSI Class)</b>
<b>300#</b>
720 psig @ 100°F (49.6 Bars @ 38°C)
330 psig @ 800°F (22.8 Bars @ 426°C)
<b>600#</b>
1440 psig @ 100°F (99.3 Bars @ 38°C)
660 psig @ 800°F (45.5 Bars @ 426°C)


Model Specifications	V100 and V110	
Sensor Code	05	10
<b>Sensor Diameter</b>	7/16" (11mm)	7/8" (22mm)
<b>ANSI Class</b>	600#	300#
<b>Pipe Size</b>	2" - 6" (50mm - 150mm)	6" - 48" (150mm - 1200mm)
<b>Instrument Connection</b>	1/2" NPT	1/2" NPT or Direct Mount
<b>Components Furnished</b>	Weld coupling, tube fitting; V110 includes additional weld coupling and plug	
<b>Weld Coupling Size</b>	3/4" NPT	1" NPT

# Verabar® Regular Models

## V100 (Single Support)

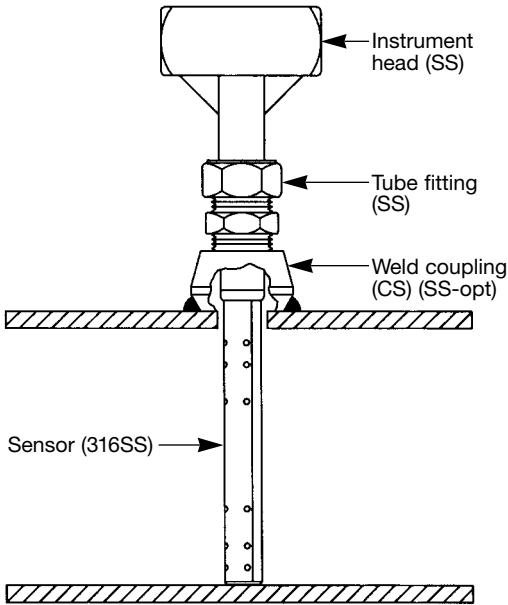


## V110 (Double Support)

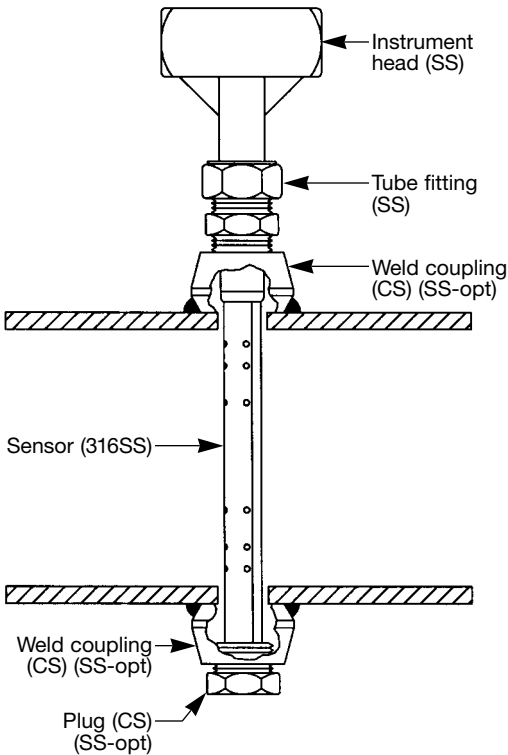


Furnish the following information:

### 1. Enter Pipe Dimensions or Duct Dimensions




Pipe Size \_\_\_\_ Sch \_\_\_\_  
 Pipe ID \_\_\_\_ and  
 Wall \_\_\_\_ Pipe Mat'l \_\_\_\_




Height (H) \_\_\_\_  
 Width (W) \_\_\_\_  
 Wall \_\_\_\_  
 Duct Mat'l \_\_\_\_


### 2. Pipe or Duct Orientation



(H) Horizontal



(V) Vertical



Short  
 Straight Run  
 Consult Factory

### 3. Enter Flow Conditions

Fluid Name:		Maximum	Normal	Minimum	Units
Flow Rate					
All Fluids	Temperature @ Flow				
	Pressure @ Flow				
Gas	Specific Gravity, or Molecular Weight				
Liquid	Specific Gravity				
Steam	Veracalc Program can calculate Density from Temperature and Pressure				

### 4. Select Model from page 3.
















Use the Ordering Information table on page 3 to determine your model number.

### 5. Flow Calculation




All Verabar applications require a flow calculation to verify the DP, pressure and temperature limits, structural limits and to size the transmitter. The Veracalc PC Program is for use by representatives and end users. It is easy to operate and **includes steam tables**.

# Ordering Information

Model	Regular						
<b>V100</b> <b>V110</b>	Compression Fitting (Single Support) Compression Fitting (Double Support)						
<b>Pipe Size and Schedule or Exact ID and Wall Thickness</b>							
<b>Code</b>	<b>Sensor Pipe Size Range</b>						
<b>05</b> <b>10</b>	2" to 6" (50mm to 150mm) 6" to 48" (150mm to 1200mm)						
<b>Code</b>	<b>Pipe Orientation</b>						
<b>H</b> <b>V</b>	Horizontal Vertical						
<b>Instrument Connections (Select Remote or Direct Mount)</b> (Transmitter sold separately; see Field Flow Systems literature)							
 <b>Remote Mount Transmitter</b> (1/2" NPT)				 <b>Direct Mount Transmitter</b> (Flanged 250°F/120°C Max.)			
Parallel	Regular	RTD*	Valve	Transmount	Mass Transmount*	Manifold	
		 Explsn. Proof	 Integral		 Integral RTD	 Remote RTD	
<b>P</b>	<b>R</b>	<b>D</b>	<b>T</b>	<b>F</b>	<b>G</b>	<b>E</b>	
<b>Instrument Valves (Opt.)</b>				<b>Manifolds (Optional)</b>			
 <b>Remote Mount</b>				 <b>Direct Mount</b>			
Needle	Gate	3-Valve		5-Valve			
							
1/2" NPT	1/2" NPT	Soft Seat	Hard Seat	Soft Seat	Hard Seat		
<b>C2NC</b> (CS) <b>C2NS</b> (SS)	<b>C2GC</b> (CS) <b>C2GS</b> (SS)	<b>F3SC</b> (CS) <b>F3SS</b> (SS)	<b>F3HC</b> (CS) <b>F3HS</b> (SS)	<b>F5SC</b> (CS) <b>F5SS</b> (SS)	<b>F5HC</b> (CS) <b>F5HS</b> (SS)		
Optional							
<b>Code</b>	<b>Options</b>						
<b>WNS</b>	For stainless steel pipes. For V100, furnished with one SS weld coupling. For V110, furnished with two SS weld couplings and one SS plug.						
<b>V110</b>	<b>8"sch40</b>	<b>10</b>	<b>H</b>	<b>R</b>	<b>C2NC</b>	<b>Typical Model Number</b>	

\* For high pressure (>500psig) and high temperature (>500°F) remote mount RTD in a thermowell is preferred.

R M O M O N T E	PARALLEL	REGULAR	RTD	VALVE	VALVE	NEEDLE	GATE
	1/2" NPT	1/2" NPT	X PROOF	INTEGRAL		1/2" NPT	1/2" NPT
CODE	P	R	D	T	S	C2NC (CS) C2NS (SS)	C2GC (CS) C2GS (SS)
D M I O R U N C T	TRANSMOUNT	MASS TRANSMOUNT	MANIFOLD	MANIFOLDS			
	F	INT RTD	RMT RTD	INTEGRAL	3-VALVES	5-VALVES	
CODE	F	G	E	M	SOFT SEAT F3SC (CS) F3SS (SS)	HARD SEAT F3HC (CS) F3HS (SS)	SOFT SEAT F5SC (CS) F5SS (SS)
						HARD SEAT F5HC (CS) F5HS (SS)	

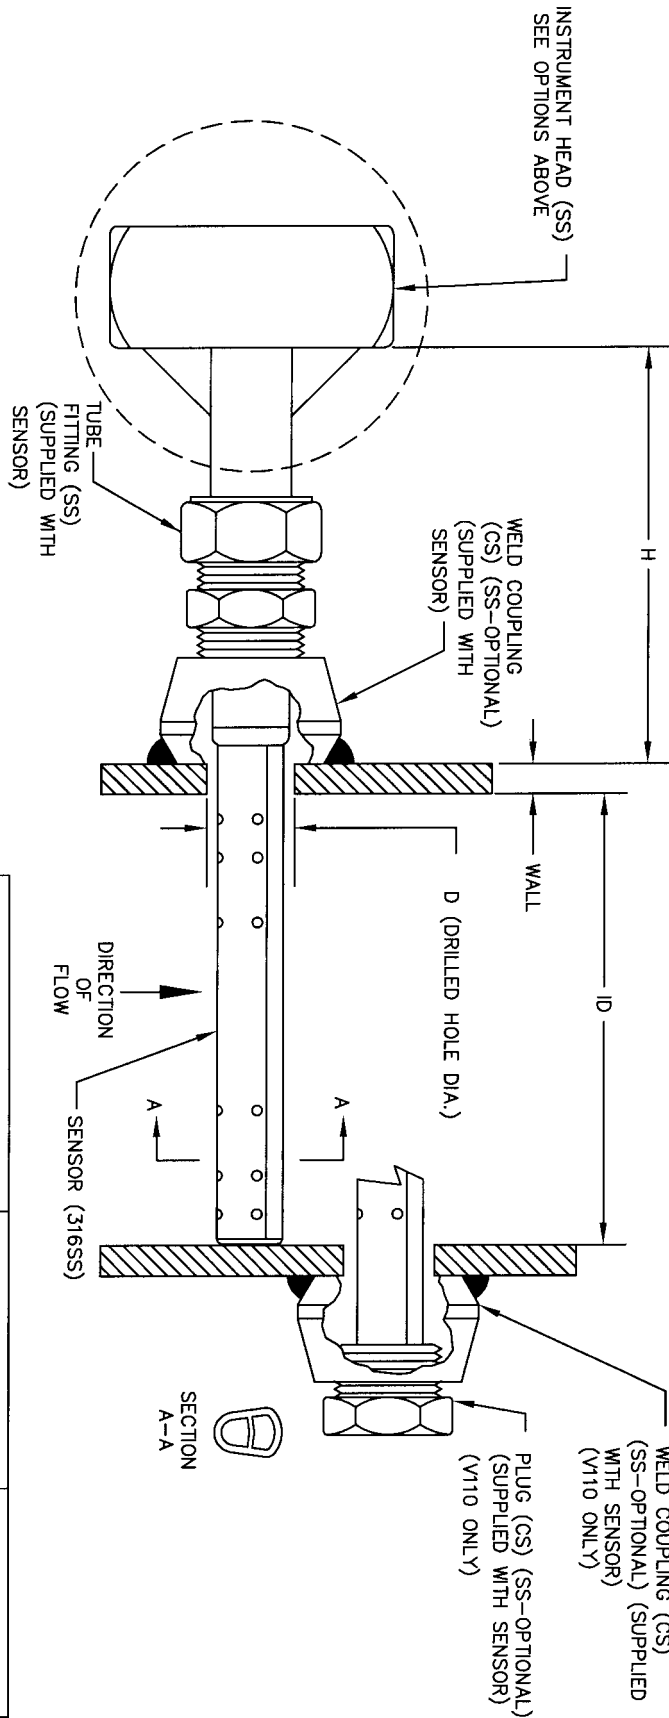

ITEM	SENSOR -05	SENSOR -10
ANSI RATING	CLASS 600#	CLASS 300#
SENSOR DIA.	7/16" (11mm)	7/8" (22mm)
DIM 'D' DRILLED HOLE DIAMETER	1/2" (13mm)	1" (26mm)
FITTING SIZE	5/8" TUBE X 3/4" NPT	1" TUBE X 1" NPT
COUPLING SIZE	3/4" NPT	1" NPT
DIM 'H'	4.0" (102mm)	5.5" (140mm)

CUSTOMER: \_\_\_\_\_  
 PROJECT: \_\_\_\_\_  
 ORDER NO: \_\_\_\_\_  
 TAG NO: \_\_\_\_\_  
 PIPE SIZE & SCHEDULE: \_\_\_\_\_  
 CATALOG NO: \_\_\_\_\_  
 SERIAL NO: \_\_\_\_\_  
 CERTIFIED BY: \_\_\_\_\_ DATE: \_\_\_\_\_

**Veris, inc.**  
 6315 MONARCH PARK PLACE  
 NIWOT, CO 80503  
 PHONE: 303-652-8550  
 FAX: 303-652-8552

VERABAR MODEL: V100/110  
 TUBE FITTING, THREADED

DATE 09/20/01 DWG NO. SUB-3934  
 SCALE NTS REV A PAGE 1 OF 1